



Lecture 7: Routing

Reading 5.2
Computer Networks, Tanenbaum

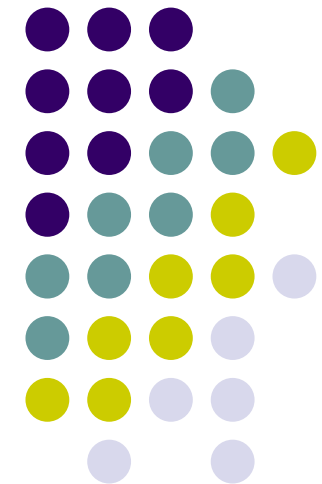


Contents

- What is routing?
- Static routing and dynamic routing
- Routing algorithms and protocols

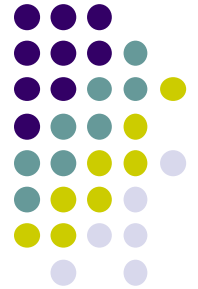


What is routing?


Routing principals
Forwarding mechanism
“Longest matching” rule

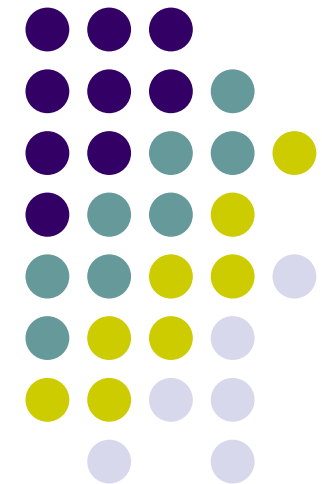



Routing and Forwarding principles (1)

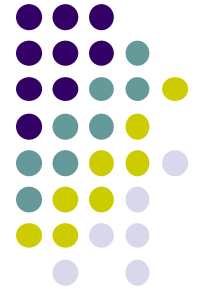


- When a host send an IP packet to another host
 - If the destination and the source are in the same network (by IP address): Transfer directly by Layer 2
 - If the destination is in a different network with the source: Send through some other routers (need to choose route)

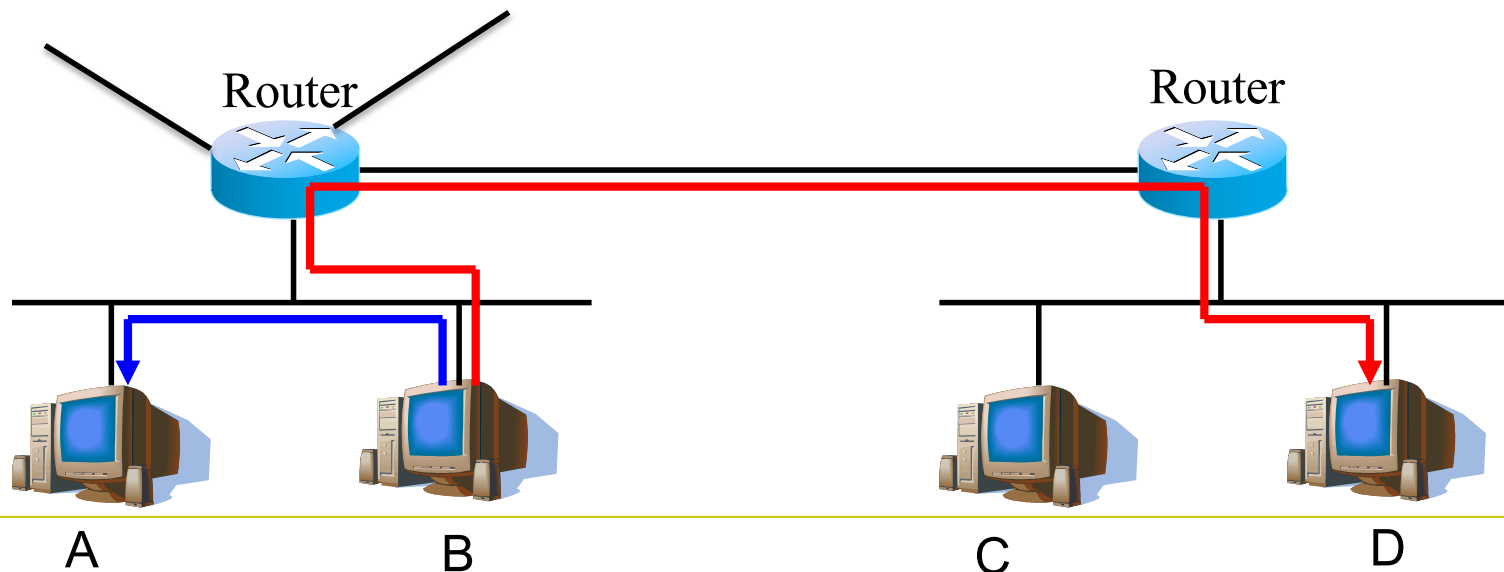


Routing and Forwarding principles (2)

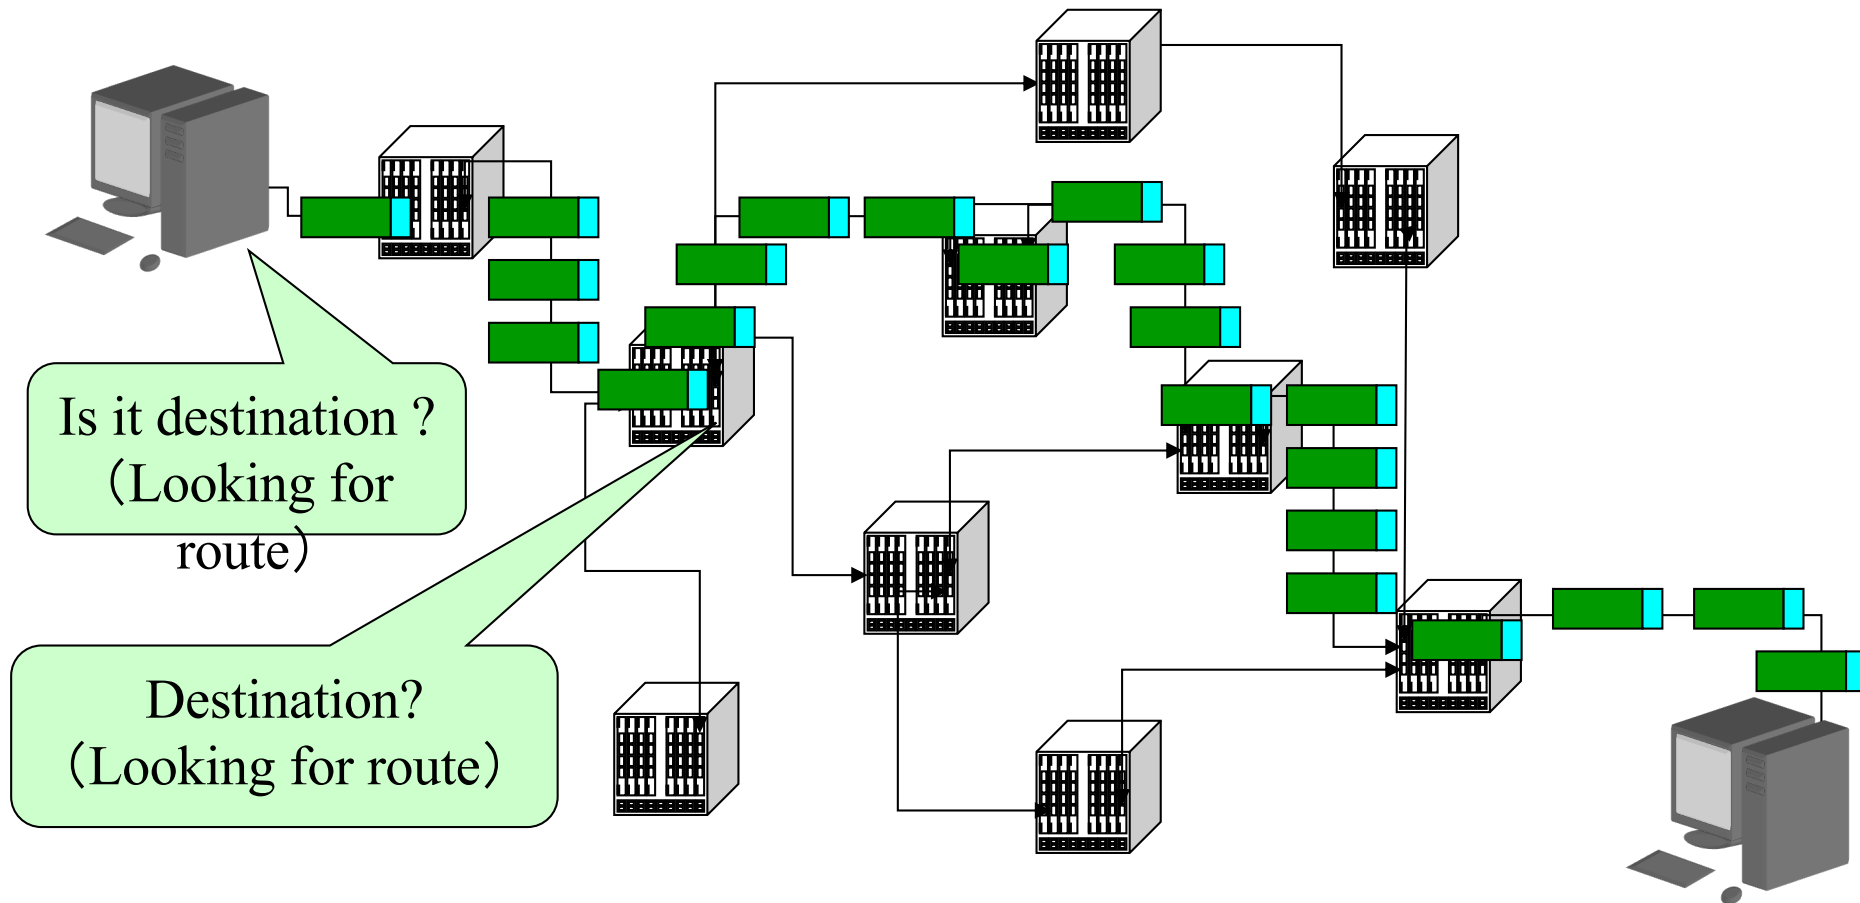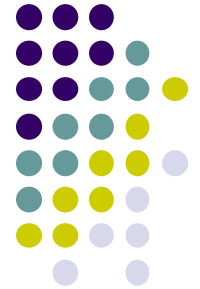

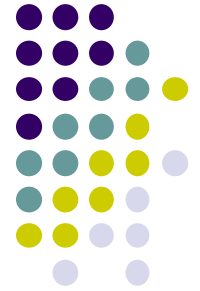

What is routing?

- The mechanism based on what a host or a router decides how to forward a packet to a destination.
- Result of the routing is a routing table
- What to consider in routing
 - Building routing table
 - Information need to calculating route
 - Routing algorithm and protocol.

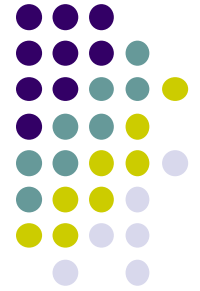

What is a router?

- Router is the device that forwards data between networks
 - Is a computer with particular hardware
 - Connects multiple networks together, has multiple network interfaces
 - Forward packets according to routing table
- Within a network (hosts having identical networkID part), router is not used for forwarding data.

Some examples of routers...



BUFFALO
BHR-4RV



PLANEX
GW-AP54SAG



YAMAHA
RTX-1500



Cisco 2600

Router ngoại vi



Cisco CRS-1

Router mạng trục



Hitachi
GR2000-1B



Juniper M10



Foundry Networks
NetIron 800




Cisco 3700

Router cỡ trung

<http://www.cisco.com.vn>

<http://www.juniper.net/>

<http://www.buffalotech.com>

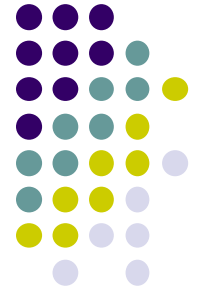


Routing table

- Lists of possible routes, saved in the memory of router
- Main components of routing table
 - Destination network address/network mask
 - Next router


```
#show ip route
```

Prefix	Next Hop
203.238.37.0/24	via 203.178.136.14
203.238.37.96/27	via 203.178.136.26
203.238.37.128/27	via 203.178.136.26
203.170.97.0/24	via 203.178.136.14
192.68.132.0/24	via 203.178.136.29
203.254.52.0/24	via 203.178.136.14
202.171.96.0/24	via 203.178.136.14

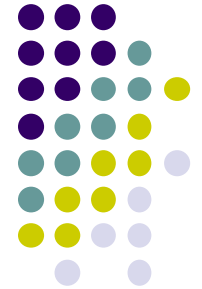


Routing table and forwarding mechanism (1)

Network	Next-hop	Interface
10.0.0.0/24	A	eth1
172.16.0.0/24	C	eth2
192.168.0.0/24	B	eth3

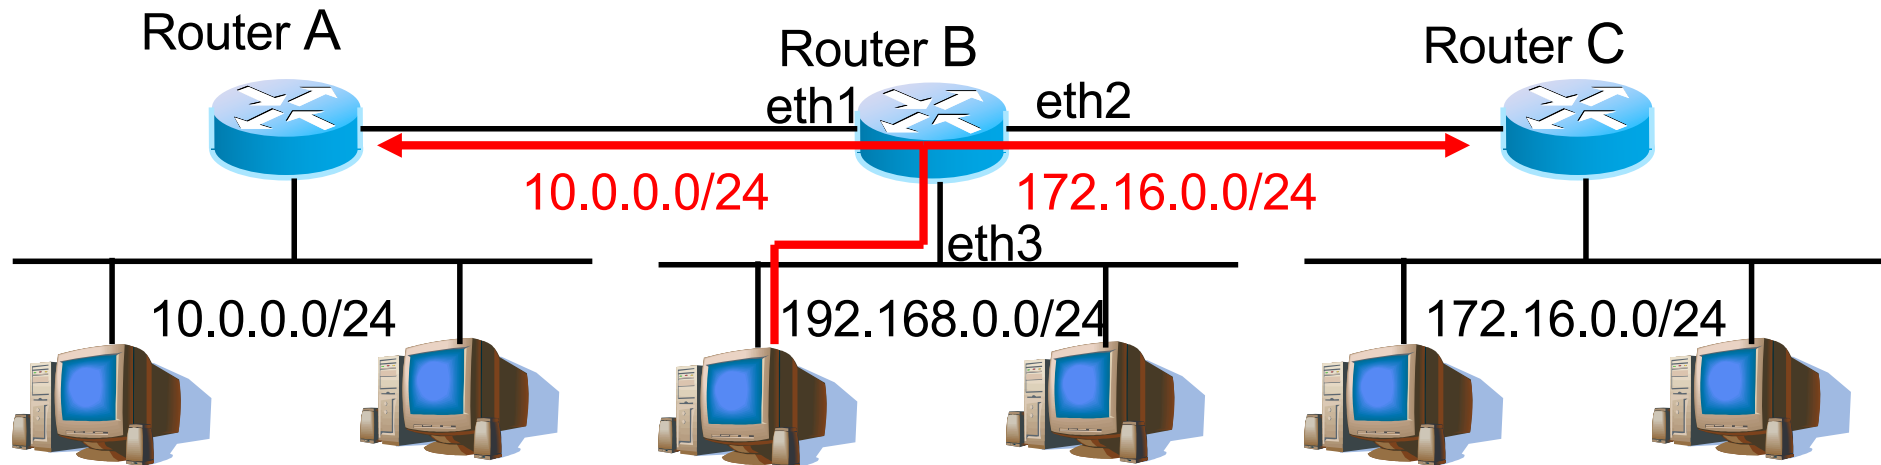


Rule: *No routes, no reachability!*

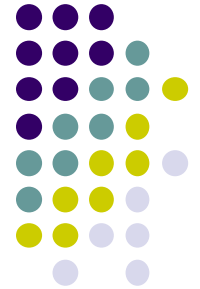

“Longest matching” rule (1)

- Assume that there are more than one entry matching with a destination network in routing table.
- Destination address: 11.1.2.5
- What should be chosen as the next hop?

Network	Next hop
11.0.0.0/8	A
11.1.0.0/16	B
11.1.2.0/24	C

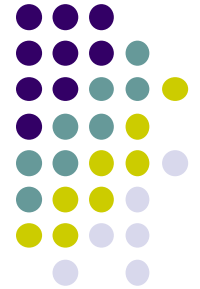

“Longest matching” rule (2)

Destination address:

11.1.2.5 = 00001011.00000001.00000010.00000101

Route 1:

11.1.2.0/24 = 00001011.00000001.00000010.00000000


Route 2:

11.1.0.0/16 = 00001011.00000001.00000000.00000000

Route 3:

11.0.0.0/8 = 00001011.00000000.00000000.00000000


Routing table and forwarding mechanism (2)

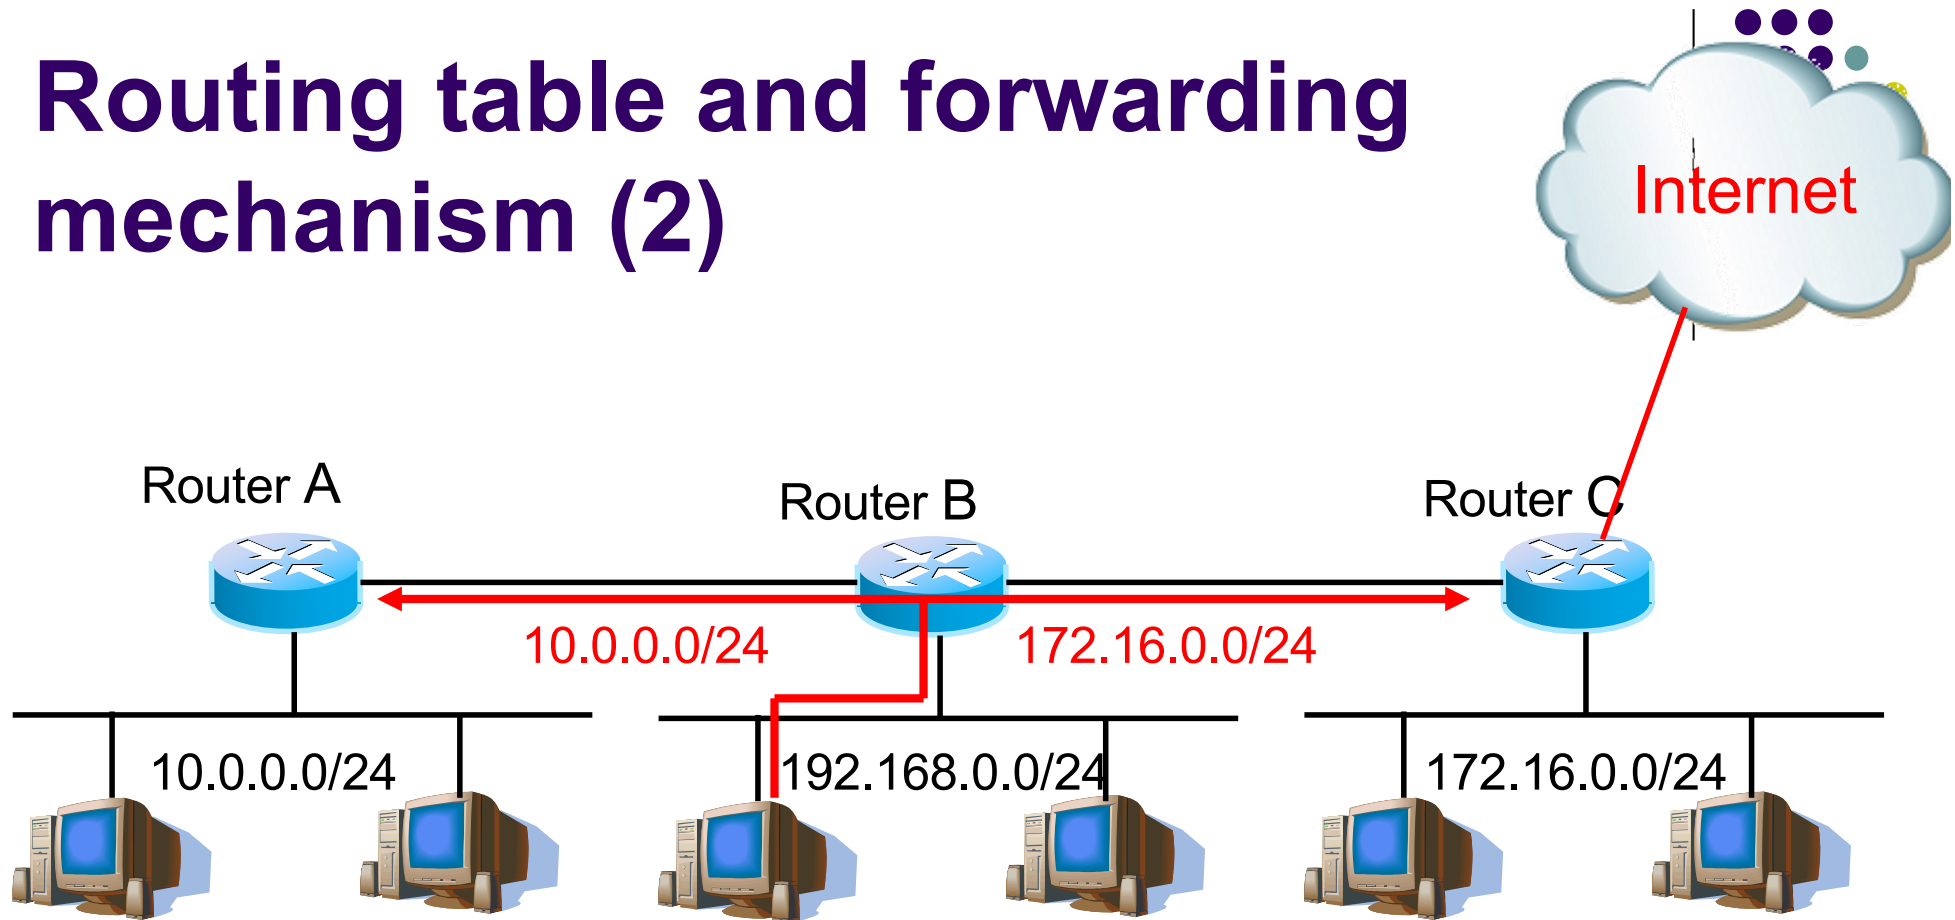

Network	Next-hop
10.0.0.0/24	A
172.16.0.0/24	C
192.168.0.0/24	Direct
0.0.0.0/0	C


Q. What is the routing table in C?


Q: What if C is connected to the Internet?

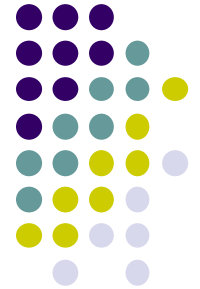

Default route


- If router does not find a route to a destination in its routing table, default route is necessary
 - Default route is defined for all destination networks that are not figured in the routing table.
- 0.0.0.0/0
 - Is a special notation for all destination networks

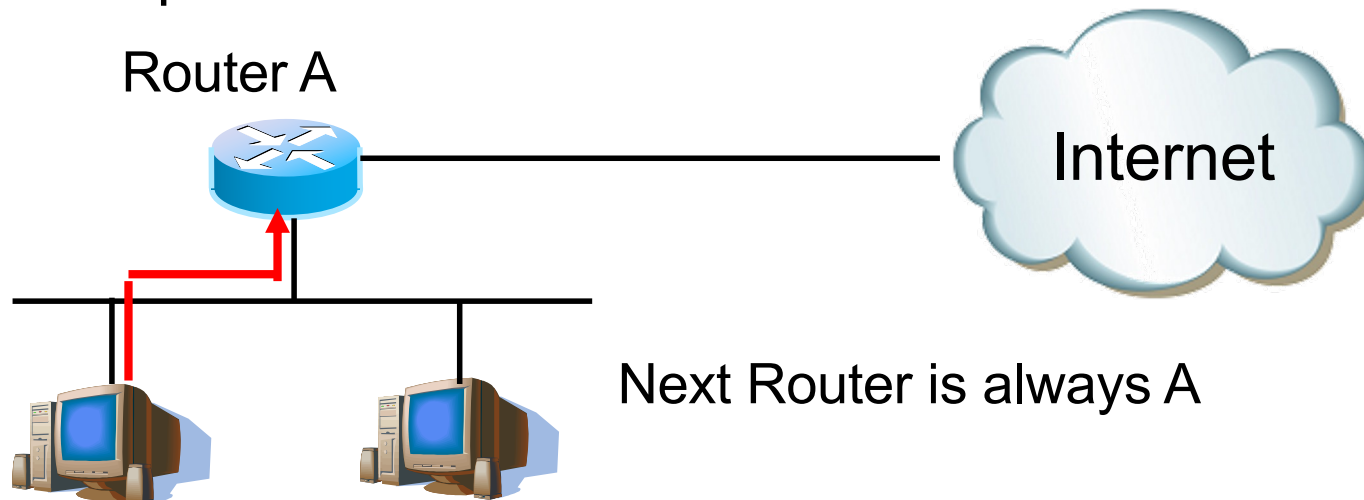


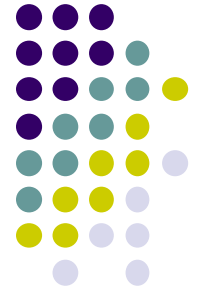

Route aggregation

- How many networks in the Internet?
- There will be a lot of entries in the routing table?
- The entries to sub-networks of the same “big” network can be aggregated in order to reduce the size of routing table.

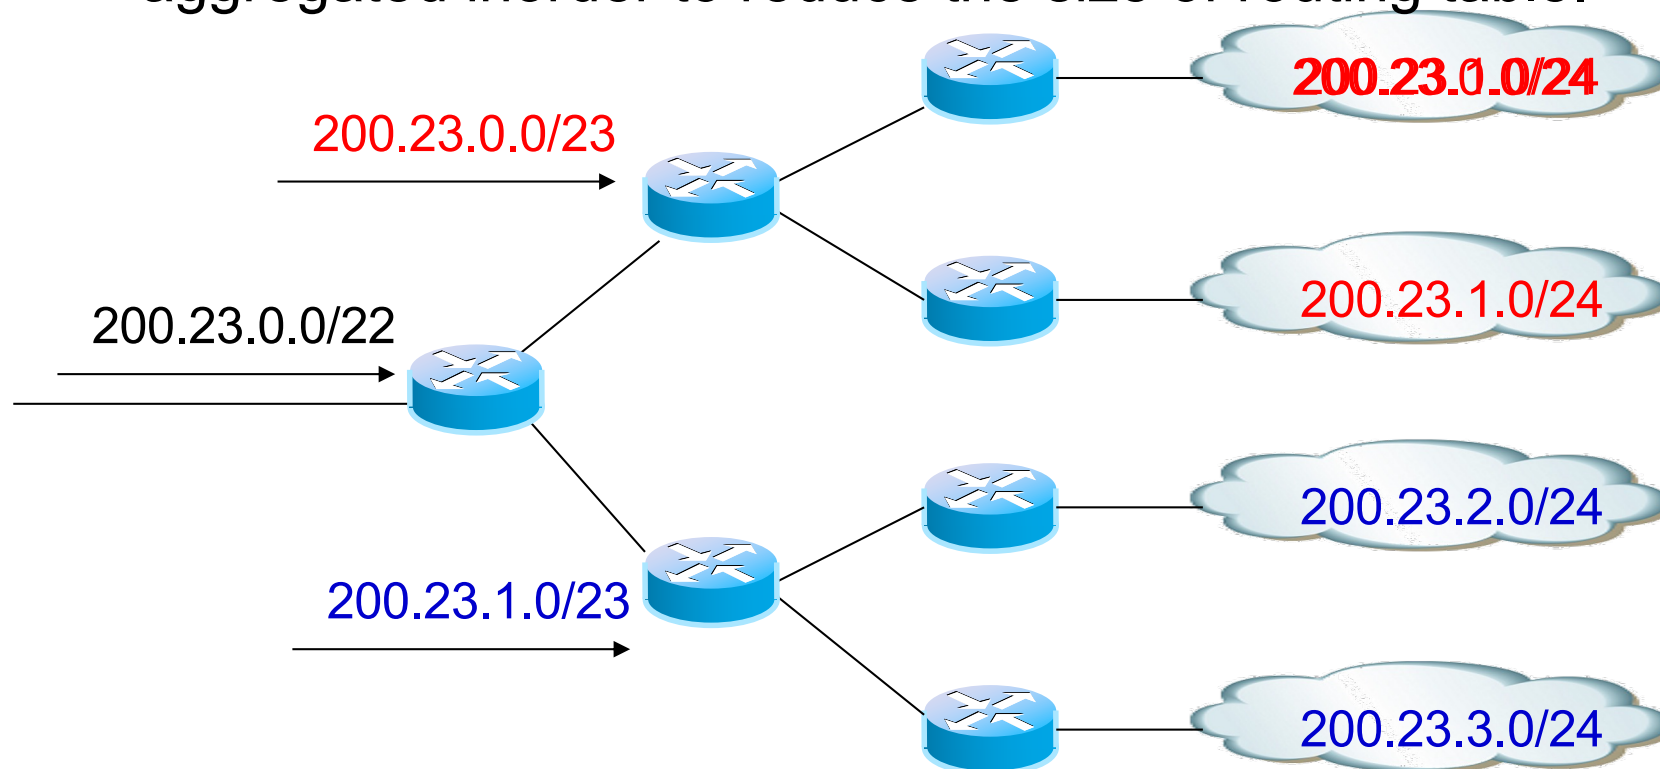


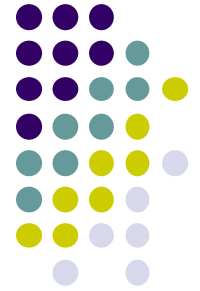

Route aggregation (2)


- Example of Viettel network
 - Viettel own a big IP address space
 - 203.113.128.0-203.113.191.255
 - For connecting to a subnet (client) of Viettel, routing table needs only to have a route to Viettel network.
- Default route is a type of route aggregation
 - 0.0.0.0/0

Packet processing on routers

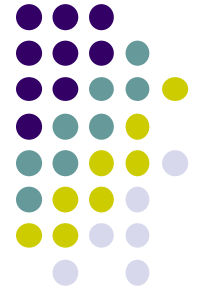

- Step 1 : If TTL = 1(or TTL = 0), destroy the packet and send error message. End.
- Step 2 : If TTL >1, extract the IP destination address of the packet. Apply the mask of networks in the routing table to IP destination address to find corresponding network addresses.
- Step 3 : Compare the obtained network addresses with networks in routing table.
 - If find a matching route, forward the packet to the interface of the route, reduce TTL by 1.
 - If no route match, check if there is a default route (with network 0.0.0.0 /0).
 - If there is a default route, forward the packet to the corresponding interface and reduce TTL by 1.
 - If there is no default route: destroy the packet, send an error message back to the source.

Exercises

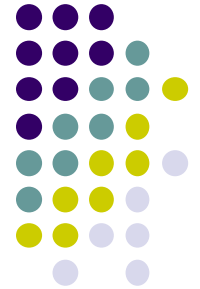

- A router has the following (CIDR) entries in its routing table:

Address/mask Next hop

135.46.56.0/22 Interface 0

135.46.60.0/22 Interface 1

192.53.40.0/23 Router 1

0.0.0.0/0 Router 2

- For each of the following IP addresses, what does the router do if a packet with that address arrives?

(a) 135.46.63.10

(b) 135.46.57.14


(c) 135.46.52.2

(d) 192.53.40.7

(e) 192.53.56.7

Solution:

Apply longest matching rule.

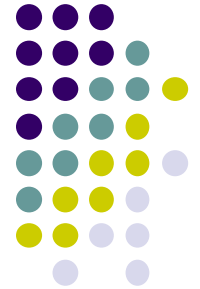

Solution

Apply longest matching rule.

(students should explain why by matching binary form of the addresses)


(a) 135.46.63.10 → Interface 1

(b) 135.46.57.14 → Interface 0

(c) 135.46.52.2 → Router 2 (default route)


(d) 192.53.40.7 → Router 1


(e) 192.53.56.7 → Router 2 (default route)

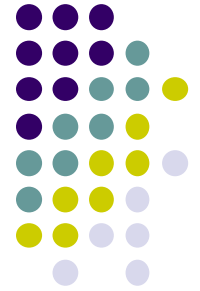

Exercise

- Assume that we have a network with following topology. What should be routing table of routers B, C, D in order to assure that all hosts can send data to each other and to the Internet.

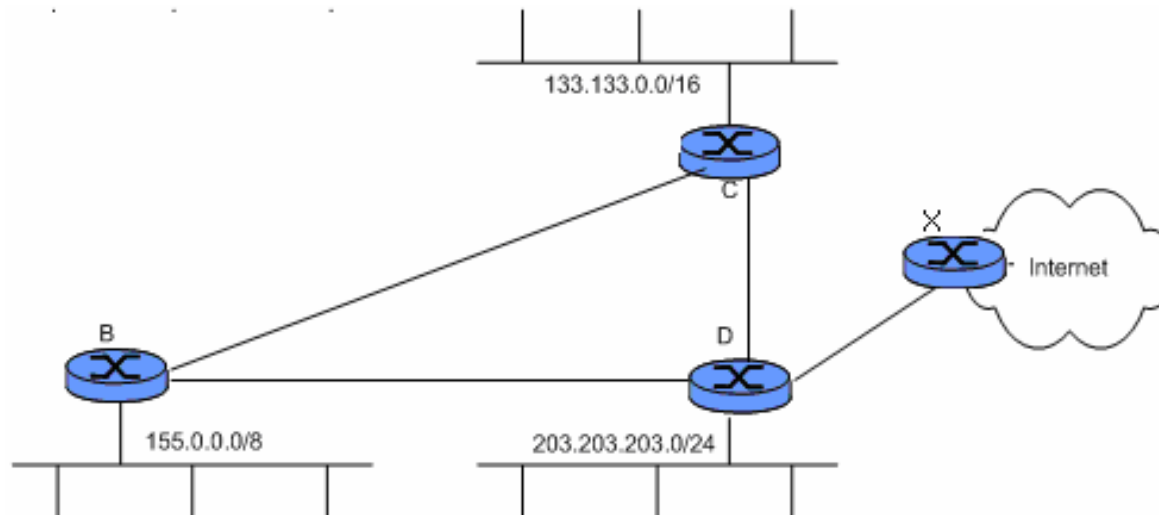

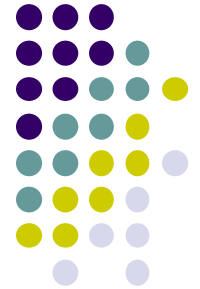

Solution

- Routing table on B

Network	Next hop
133.133.0.0/16	C
155.0.0.0/8	Direct
203.203.203.0/24	D
0.0.0.0/0	D


- Routing table on C

Network	Next hop
133.133.0.0/16	Direct
155.0.0.0/8	B
203.203.203.0/24	D
0.0.0.0/0	D

- Routing table on D

Network	Next hop
133.133.0.0/16	C
155.0.0.0/8	B
203.203.203.0/24	Direct
0.0.0.0/0	X

Example of routing table on a host

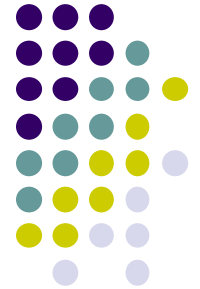

```
C:\Documents and Settings\hongson>netstat -rn
```

```
Route Table
```

```
=====
```

```
Interface List
```

```
0x1 .....MS TCP Loopback interface
```

```
0x2 ...08 00 1f b2 a1 a3 ..... Realtek RTL8139 Family PCI Fast Ethernet NIC -
```

```
=====
```


```
Active Routes:
```

Network	Netmask	Gateway	Interface	Metric
0.0.0.0	0.0.0.0	192.168.1.1	192.168.1.34	20
127.0.0.0	255.0.0.0	127.0.0.1	127.0.0.1	1
192.168.1.0	255.255.255.0	192.168.1.34	192.168.1.34	20
192.168.1.34	255.255.255.255	127.0.0.1	127.0.0.1	20
192.168.1.255	255.255.255.255	192.168.1.34	192.168.1.34	20
224.0.0.0	240.0.0.0	192.168.1.34	192.168.1.34	20
255.255.255.255	255.255.255.255	192.168.1.34	192.168.1.34	1

```
Default Gateway: 192.168.1.1
```

```
=====
```

Example of routing table in a Router

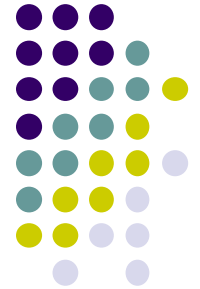


```
#show ip route
```

Prefix	Next Hop
203.238.37.0/24	via 203.178.136.14
203.238.37.96/27	via 203.178.136.26
203.238.37.128/27	via 203.178.136.26
203.170.97.0/24	via 203.178.136.14
192.68.132.0/24	via 203.178.136.29
203.254.52.0/24	via 203.178.136.14
202.171.96.0/24	via 203.178.136.14

Static and dynamic routing

Static routing
Dynamic routing
Advantage – Weakness

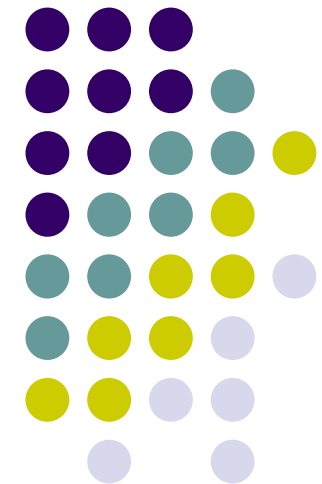

Problem of update routing table



- When topology change: new networks, a router is out of power
- It is necessary that routing tables are updated
 - In theory, all routers need to be updated
 - In reality, only few routers need to be updated

Network	Next-hop
192.168.0.0/24	B
172.16.0.0/24	B
10.0.0.0/24	Direct


172.16.1.0/24 B

Network	Next-hop
10.0.0.0/24	A
172.16.0.0/24	C
192.168.0.0/24	Direct


172.16.1.0/24 C

Network	Next-hop
10.0.0.0/24	B
192.168.0.0/24	B
172.16.0.0/24	Direct

??

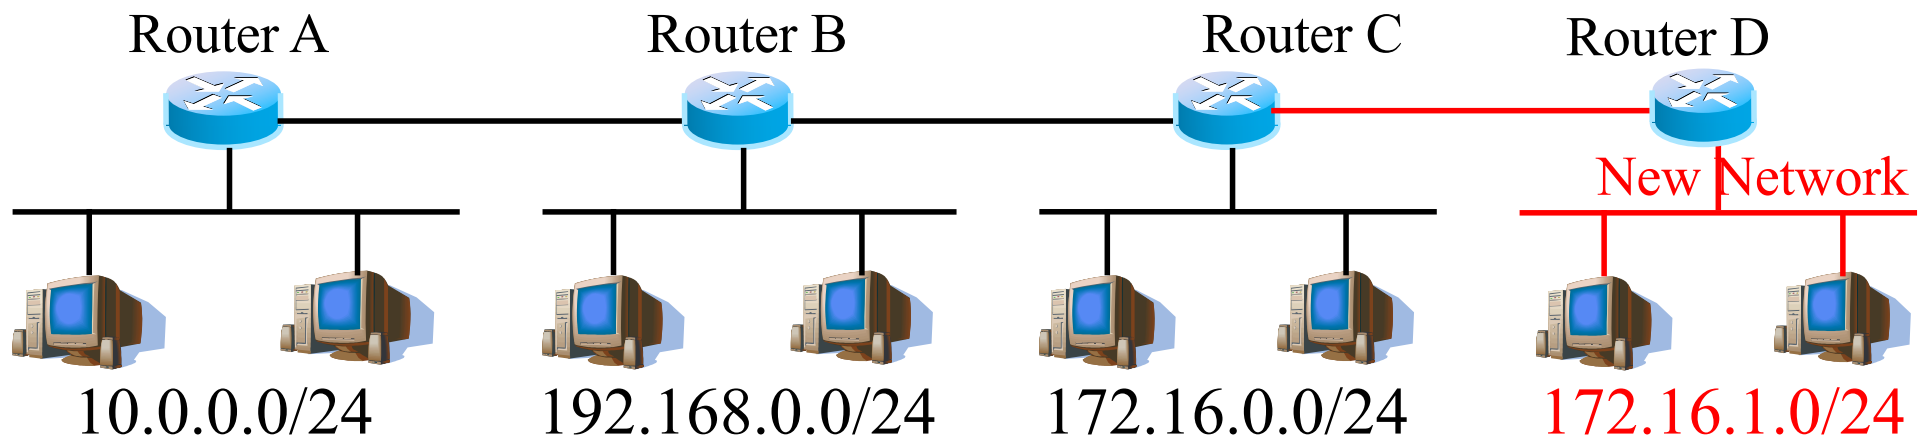

How to update routing table?

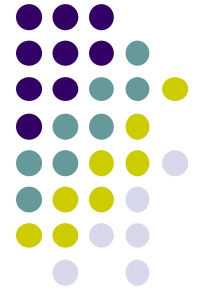

- Static routing
 - Entries in the routing tables are updated manually by network administrator.
- Dynamic routing
 - The routing table is updated automatically by some routing protocols


Static routing

- When there is some failures on a route:
 - Impossible to access to Internet even though there is an alternative route
 - Admin needs to update routing table at 10.0.0.1

Extract of routing table at 10.0.0.1

Prefix	Next-hop
0.0.0.0/0	10.0.0.3

Entry causing error

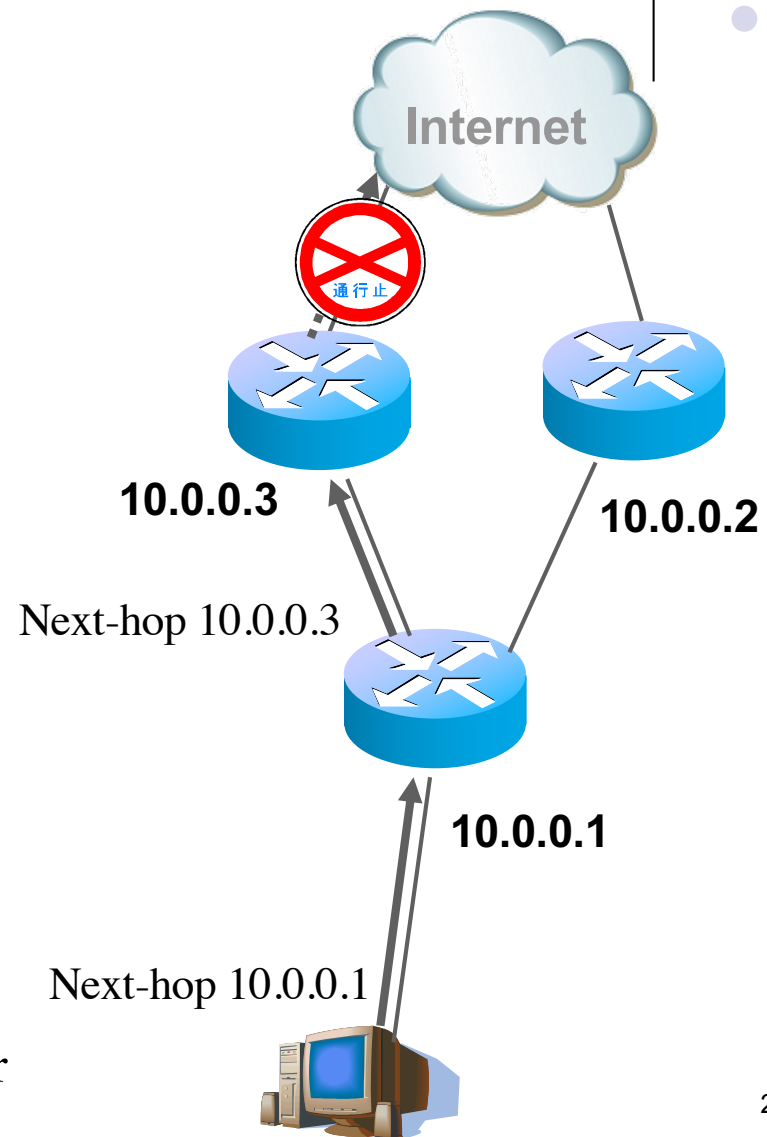

Dynamic routing


- When there is failure :
 - The entries related on the affected routes are updated automatically


Extract of routing table of 10.0.0.1

Prefix	Next-hop
0.0.0.0/0	10.0.0.2
0.0.0.0/0	10.0.0.3

Alternative route


Affected route

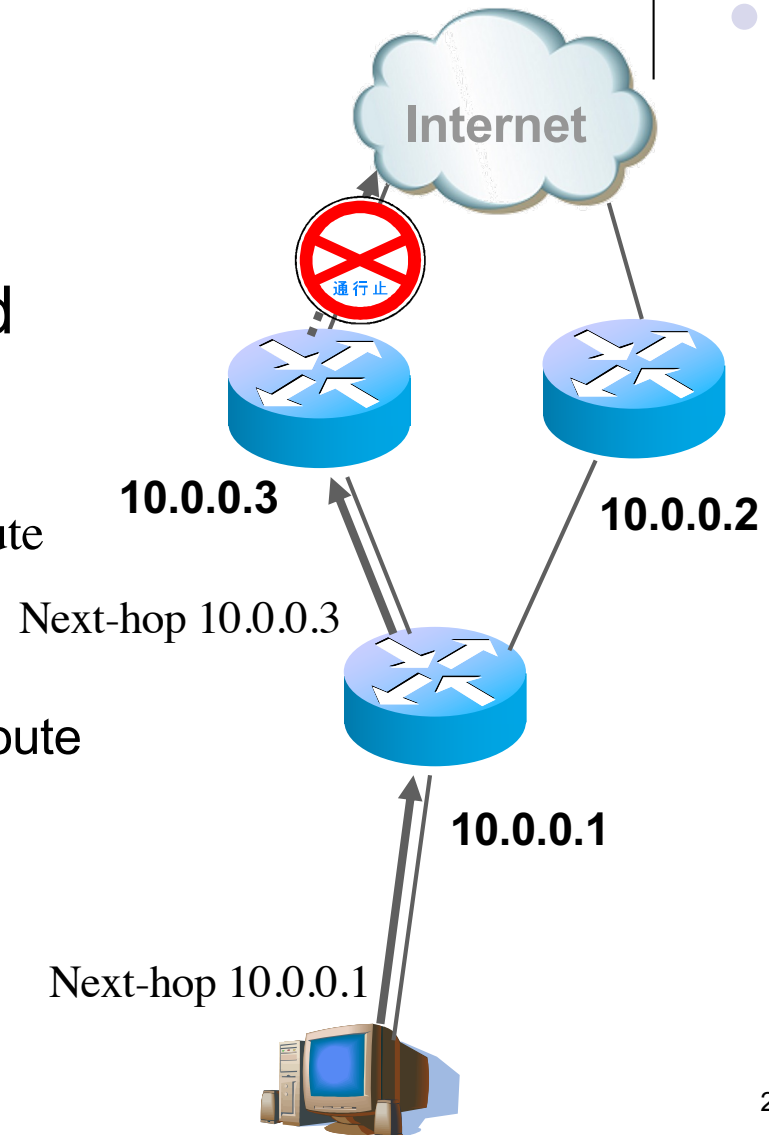

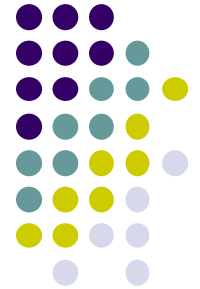

Pros/cons of static routing

- Pros
 - Stable
 - Secure
 - Not influence by external factor
 - Không bị ảnh hưởng bởi các yếu tố tác động
- Cons
 - Not flexible
 - It is impossible for using automatically backup routes
 - Difficult to manage

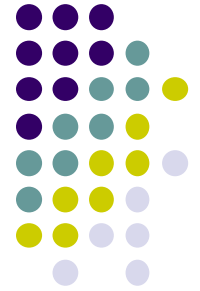


Dynamic routing


- Pros
 - Easy to manage
 - Backup routes are used automatically when there are failures
- Cons
 - Not secure
 - Routing protocols are complex

Routing algorithm and protocols


Dijkstra and Bellman-Ford Algo
link-state and distance-vector
protocols

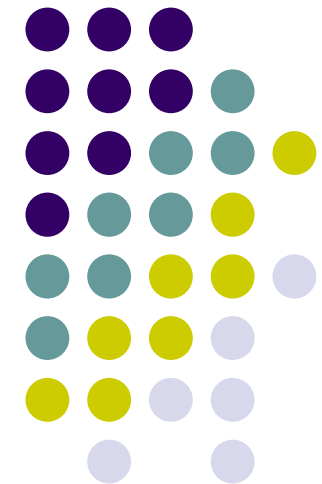



Graph representing the networks

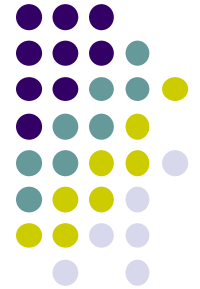

- Graph with nodes (routers) and edges (links)
- Weight on each link $c(x,y)$
 - Weigh can be bandwidth, delay, congestion level, cost... expressing the contribution of the link in the total cost of a route
- Routing algorithm: Determine the shortest path (in term of weight) between a pair of two nodes.

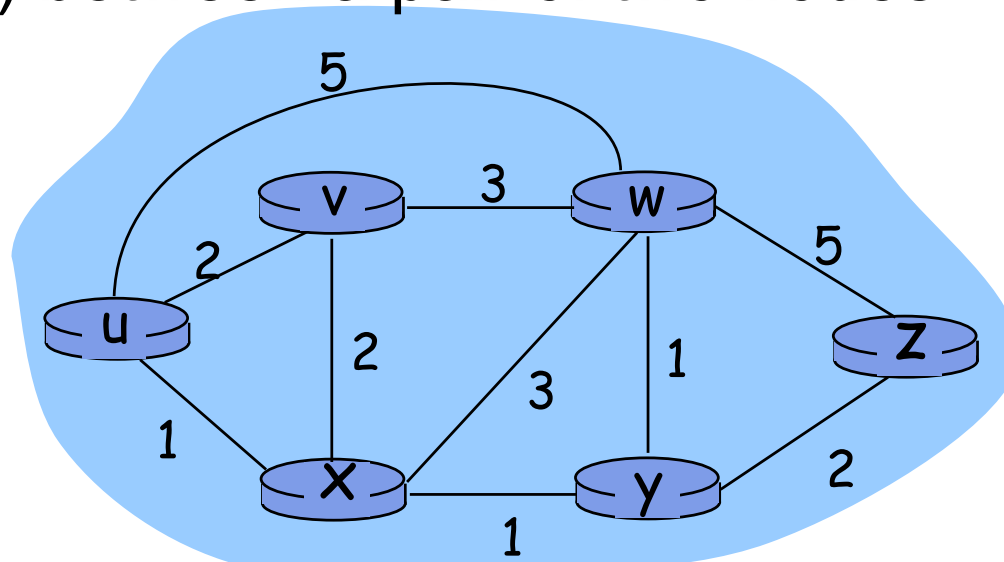


Shortest path tree-SPT

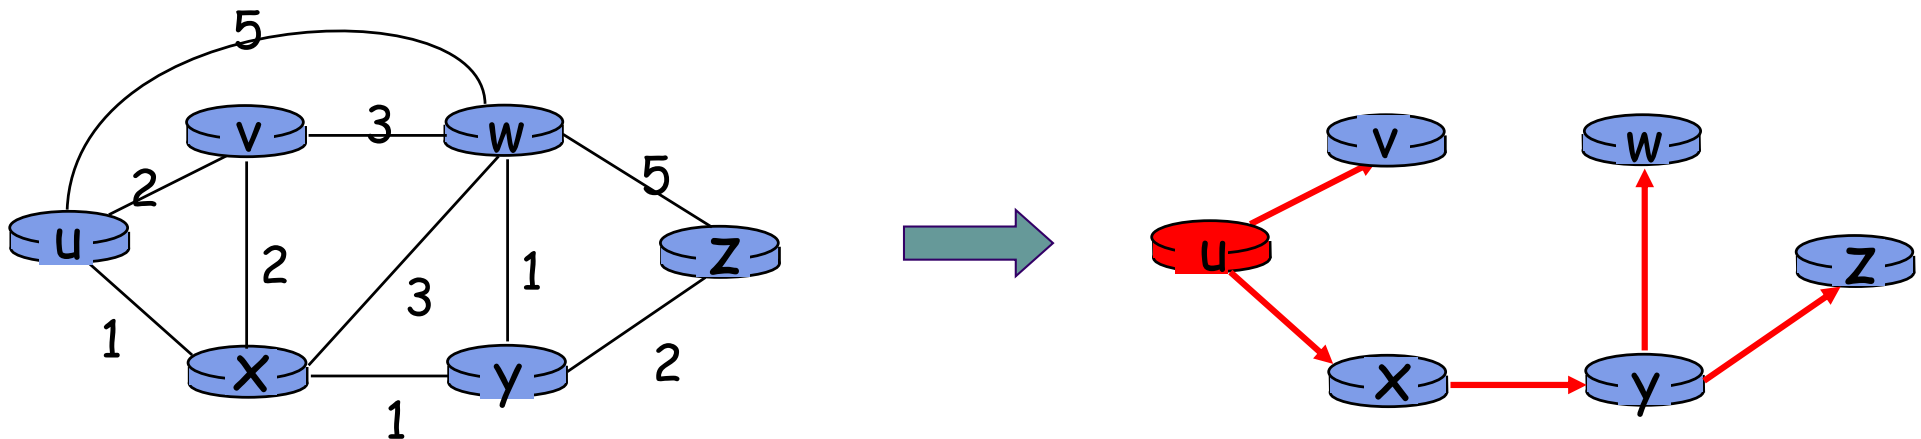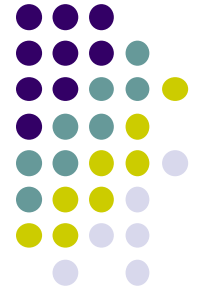


- SPT – Shortest Path Tree
- Compose of shortest paths from a single source node to all other nodes.
- Each source node has it own SPT

Two classes of routing algorithm

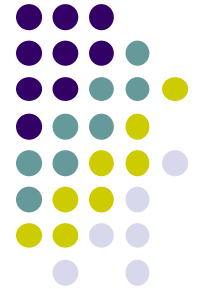

- Link-state
 - Gathering the topology information at a node → build graph
 - Run a path calculation algorithm on the node
 - Build routing table on the node
 - OSPF routing protocol
- Distance vector
 - Each node build temporary a routing table
 - Exchange routing tables for finding better routes through the neighbors
 - RIP routing protocol


Link-state algorithms- Dijkstra

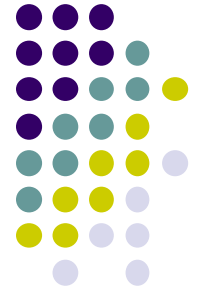

- Notations:
 - $G = (V, E)$: Graph representing the network: V : set of nodes, E : set of links
 - $c(x, y)$: cost of using link x to y ;
 - $= \infty$ if the two nodes are not linked together
 - $d(v)$: current cost for going from the source node to node v
 - $p(v)$: node right before v on the route from the source to destination
 - T : Set of nodes whose shortest paths have been identified.

Link-state algorithms-

Dijkstra

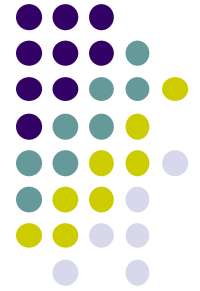

- **Procedures:**

- **Init():**

For each node v , $d[v] = \infty$, $p[v] = \text{NIL}$


$d[s] = 0$

- **Improve(u, v)**, where (u, v) is an edge of G

if $d[v] > d[u] + c(u, v)$ then

$d[v] = d[u] + c(u, v)$

$p[v] = u$

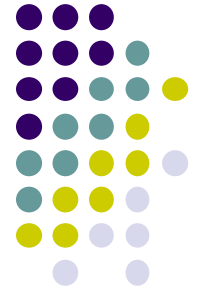


Link-state algorithms- Dijkstra



1. **Init()** ;
2. $T = \Phi$;
3. **Repeat**
4. $u: u \notin T \mid d(u)$ is the smallest;
5. $T = T \cup \{u\}$;
6. **for all** $v \in \text{neighbor}(u)$ and $v \notin T$
7. $\text{improve}(u, v)$;
8. **Until** $T = V$

Browse all u from those are nearest to the source, and try to improve the route from source to all neighbor of u by going through u

Dijkstra's algorithm: Example

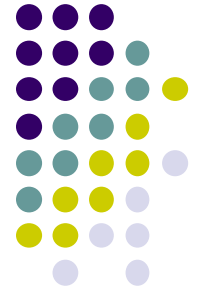

Step	T	$d(v), p(v)$	$d(w), p(w)$	$d(x), p(x)$	$d(y), p(y)$	$d(z), p(z)$
0	u	2, u	5, u	1, u	∞	∞
1	ux	2, u	4, x		2, x	∞
2	uxy	2, u	3, y			4, y
3	uxyv		3, y			4, y
4	uxyvw					4, y
5	uxyvwz					

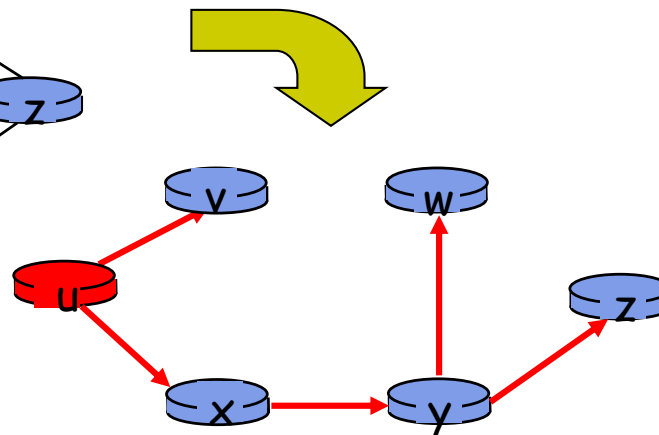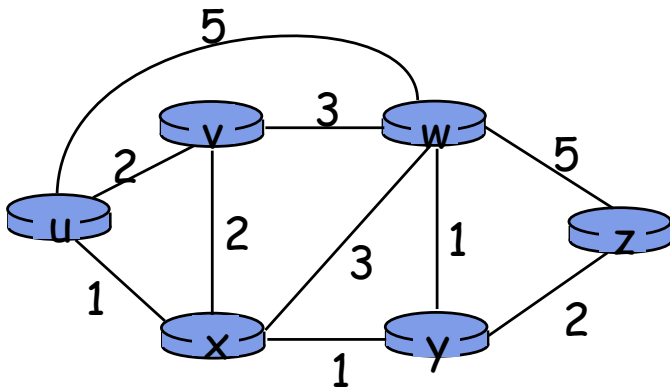


SPT of u:

Routing table of u:

destination	link
v	(u,v)
x	(u,x)
y	(u,x)
w	(u,x)
z	(u,x)

Distance-vector algorithm

Bellman-Ford (1)

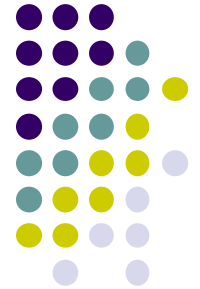

Definitions:

$d_x(y) :=$ cost of the shortest path from x
to y


We have: Bellman-Ford equation:

$$d_x(y) = \min_v \{c(x,v) + d_v(y)\}$$


For all v are adjacent to x

Distance-vector algorithm

Bellman-Ford (2)

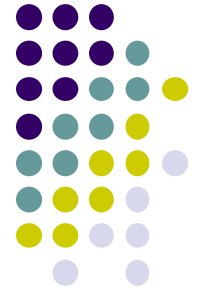


Easy to see that, $d_v(z) = 5$, $d_x(z) = 3$, $d_w(z) = 3$

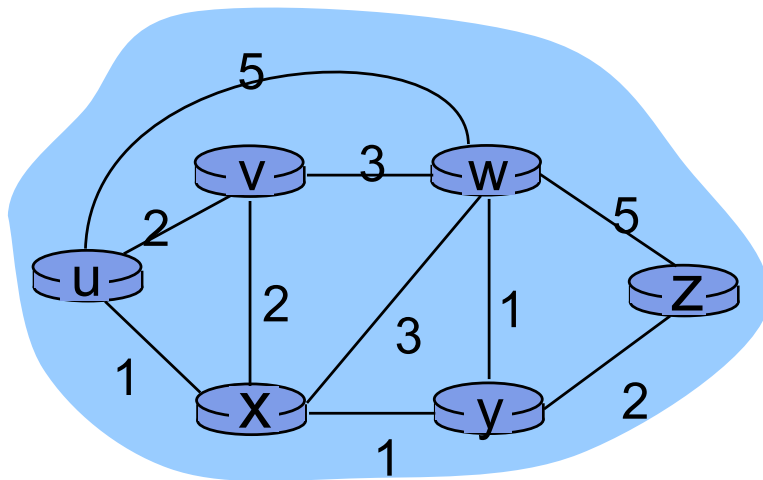

According to B-F eq. :

$$\begin{aligned} d_u(z) &= \min \{ c(u,v) + d_v(z), \\ &\quad c(u,x) + d_x(z), \\ &\quad c(u,w) + d_w(z) \} \\ &= \min \{ 2 + 5, \\ &\quad 1 + 3, \\ &\quad 5 + 3 \} = 4 \end{aligned}$$

Amongst all paths from $u \rightarrow z$, choose to go through the neighbors of u that make the path shortest

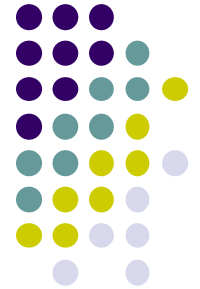


Distance-vector algorithm (2)

Main ideas:

- Distance vector: vector of all distance from the current node to all other nodes
- Each node send periodically the its distance vector to its adjacent nodes
- When a node x receives a distance vector, it updates its distance vector by using equation Bellman-ford
- With some condition, the distance $D_x(y)$ in each vector will converge to the smallest value of $d_x(y)$

At each node:

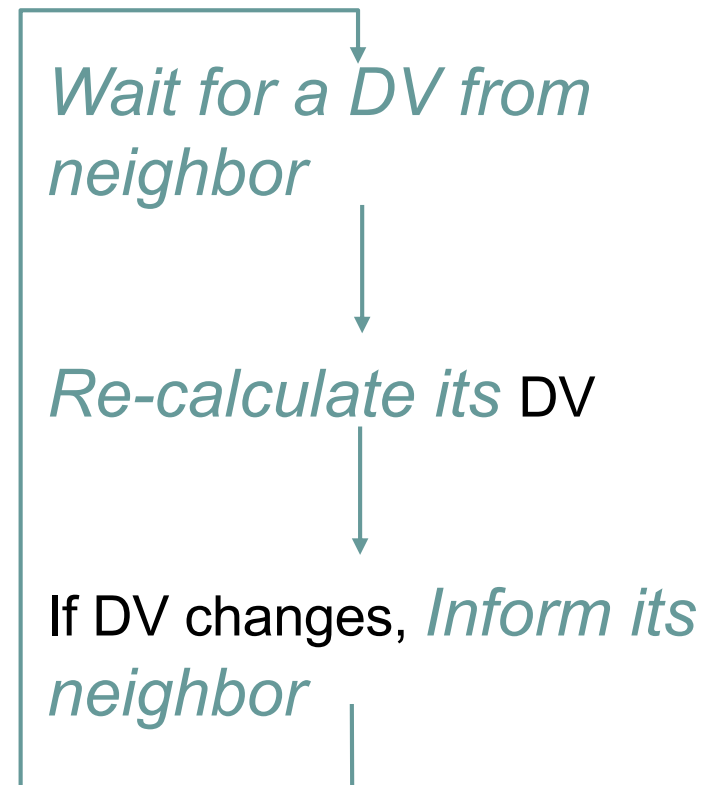

$$D_x(y) = \min\{c(x,y) + D_y(y), c(x,z) + D_z(y)\}$$

$$= \min\{2+0, 7+1\} = 2$$

Node x

		Cost to		
		x	y	z
from	x	0	2	7
	y	∞	∞	∞
	z	∞	∞	∞

		Cost to		
		x	y	z
From	x	0	2	3
	y	2	0	1
	z	7	1	0

$$D_x(z) = \min\{c(x,y) + D_y(z), c(x,z) + D_z(z)\}$$


$$= \min\{2+1, 7+0\} = 3$$

Node y

		Cost to		
		x	y	z
from	x	∞	∞	∞
	y	2	0	1
	z	∞	∞	∞

Node z

		Cost to		
		x	y	z
from	x	∞	∞	∞
	y	∞	∞	∞
	z	7	1	0

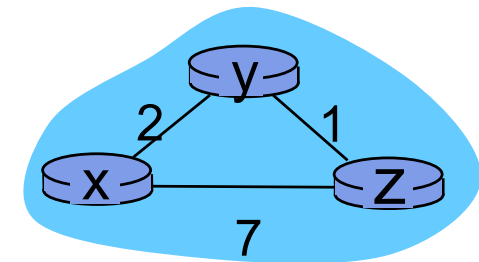

Time

$$D_x(y) = \min\{c(x,y) + D_y(y), c(x,z) + D_z(y)\} \\ = \min\{2+0, 7+1\} = 2$$

$$D_x(z) = \min\{c(x,y) + D_y(z), c(x,z) + D_z(z)\} \\ = \min\{2+1, 7+0\} = 3$$

Node x

Cost to

	x	y	z
x	0	2	7
y	∞	∞	∞
z	∞	∞	∞

Cost to

	x	y	z
x	0	2	3
y	2	0	1
z	7	1	0

Cost to

	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

Node y

Cost to

	x	y	z
x	∞	∞	∞
y	2	0	1
z	∞	∞	∞

Cost to

	x	y	z
x	0	2	7
y	2	0	1
z	7	1	0

Cost to

	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

Node z

Cost to


	x	y	z
x	∞	∞	∞
y	∞	∞	∞
z	7	1	0

Cost to

	x	y	z
x	0	2	7
y	2	0	1
z	3	1	0

Cost to


	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

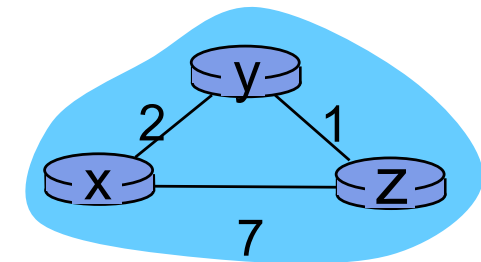

Time



Comparison of Link-state and Distance vector

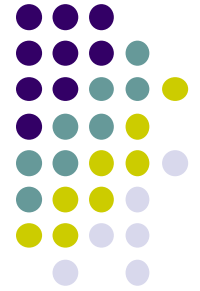

Number of exchange messages

- LS: n nodes, E links, $O(nE)$ messages
- DV: Exchange only with neighbor

Convergent time

- LS: Complexity $O(n^2)$
- DV: Varies

Reliability: If one routers provide incorrect information

LS:

- The router may send out incorrect cost
- Each node calculate its own routing table

DV:

- Incorrect distance vector may be sent out
- Each node calculate its DV based to what receives from the neighbor
 - Error propagates in the network.

